

TENAX TT SAMP

Type: **045 - 060 - 090 - 120 - 160**
Mono-oriented geogrids



TENAX **TT SAMP** are mono-oriented geogrids especially designed for soil reinforcement. TENAX **TT SAMP** geogrids are manufactured with a unique extrusion technology using high quality polymers. TENAX **TT SAMP** geogrids have high tensile modulus, great interlock capacity and junction strength, as well as superior long term design strength and durability.

Typical applications

Retaining walls; steep slopes reinforcement; landslides repair; embankments stabilization; landfill side slopes reinforcement.

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	DATA	NOTES
STRUCTURE			MONO-ORIENTED GEOGRIDS	
MESH TYPE			OVAL APERTURES	
STANDARD COLOR			BLACK	
POLYMER TYPE			HDPE	
U.V. STABILIZER			CARBON BLACK	
PACKAGING			ROLLS WITH IDENTIFICATION LABEL	


DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	TT 045 SAMP	TT 060 SAMP	TT 090 SAMP	TT 120 SAMP	TT 160 SAMP	NOTES
APERTURE SIZE MD		mm	220	220	220	220	220	b,d
APERTURE SIZE TD		mm	13/20	13/20	13/20	13/20	13/20	b,d
MASS PER UNIT AREA	ISO 9864	g/m ²	300	400	600	800	1000	b
ROLL WIDTH		m	1.0	1.0	1.0	1.0	1.0	b,f
ROLL LENGTH		m	100.0	75.0	50.0	30.0	30.0	b
ROLL DIAMETER		m	0.35	0.35	0.37	0.35	0.40	b
ROLL VOLUME		m ³	0.13	0.12	0.14	0.12	0.16	b
GROSS ROLL WEIGHT		kg	30.0	30.0	30.0	24.0	30.0	b

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	TT 045 SAMP	TT 060 SAMP	TT 090 SAMP	TT 120 SAMP	TT 160 SAMP	NOTES
STRENGTH AT 2% STRAIN	ISO 10319	kN/m	11.0	17.0	26.0	36.0	45.0	a,c
STRENGTH AT 5% STRAIN	ISO 10319	kN/m	25.0	32.0	50.0	72.0	90.0	a,c
PEAK TENSILE STRENGTH	ISO 10319	kN/m	45.0	60.0	90.0	120.0	160.0	a,c
YIELD POINT ELONGATION	ISO 10319	%	11.5	13.0	13.0	13.0	13.0	b,c
JUNCTION STRENGTH	GRI-GG2	kN/m	36.0	50.0	80.0	110.0	130.0	b
LONG TERM DESIGN STRENGTH	ISO 13431	kN/m	21.2	28.3	42.4	56.5	75.4	a,e

NOTES:


- a) 95% lower confidence limit values, ISO 2602
- b) Typical values
- c) Tests performed using extensometers at 100 mm/min at 20°C
- d) MD : machine direction (longitudinal to the roll)
TD : transverse direction (across roll width)
- e) Design strength based upon 120 years design life at 20°C and fill soil up to 40 mm size
- f) Upon request available 2 m wide

Typical Tensile Characteristics

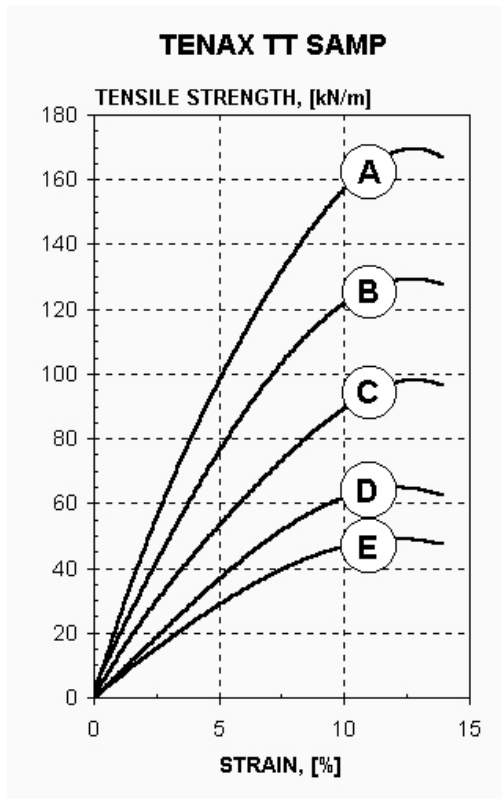

GEOGRID TYPE:

- A = TENAX TT 160 SAMP
- B = TENAX TT 120 SAMP
- C = TENAX TT 090 SAMP
- D = TENAX TT 060 SAMP
- E = TENAX TT 045 SAMP

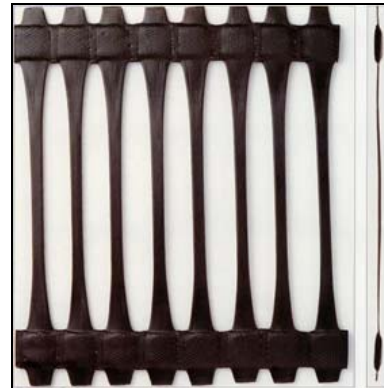

0799-CPD-25



The TENAX Laboratory has been created in 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control.

The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.

TENAX SpA Geosynthetics Division

Via dell'Industria, 3
I-23897 Viganò (LC) ITALY
Tel. (+39) 039.9219307
Fax (+39) 039.9219200
e-mail: geo.div@tenax.net
Web Site: www.tenax.net

TENAX International B.V. Geosynthetics Division

Via Ferruccio Pelli, 14
CH-6900 Lugano SWITZERLAND
Tel. (+41) 091.9242485
Fax (+41) 091.9242489
e-mail: geo@tenax.ch
Web Site: www.tenax.net